



FUNDOOK **TARGET**

- a. Components
- b. Specifications

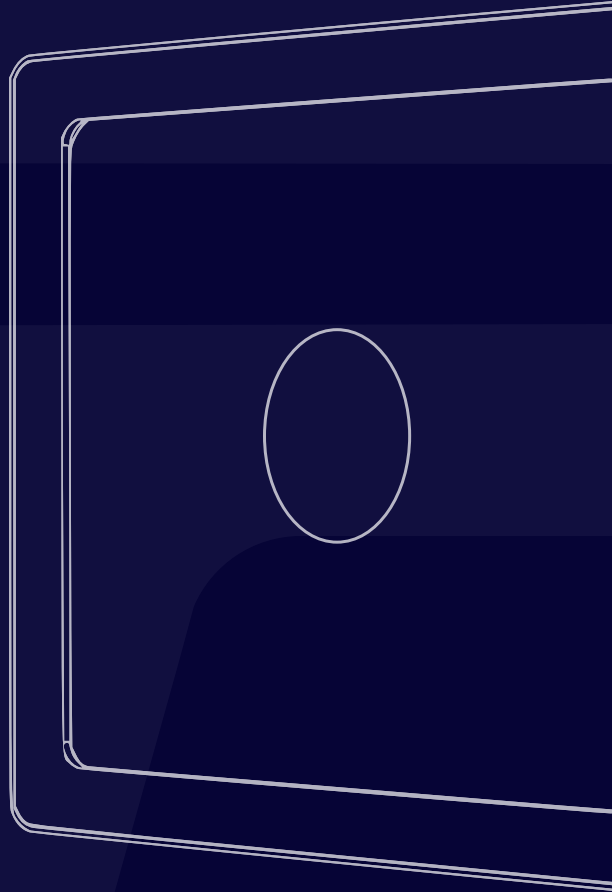


a.

Components

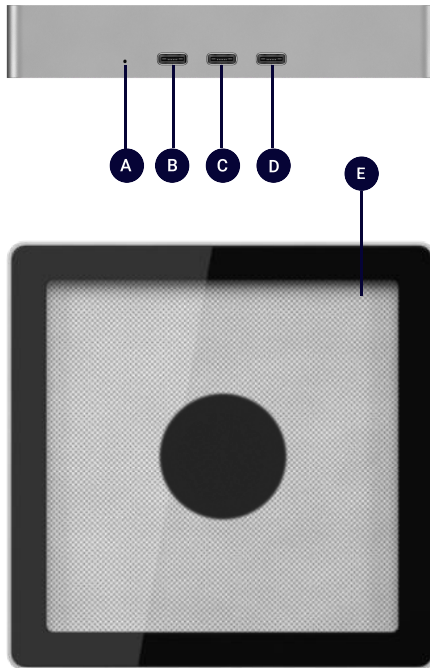

- A Master Reset
- B Accessory Port (USB-C)
- C Power Port (USB-C)
- D Serial Port (USB-C)
- E RGB Backlit

Target Ring Dimensions

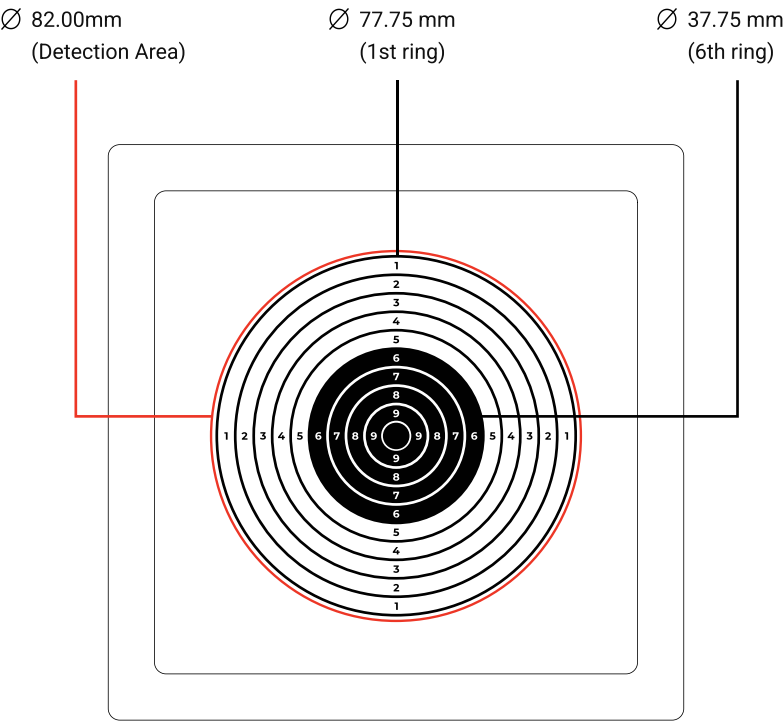

Size of Laser Dot for Score Calculation - Ø 4.5 mm

b.

Specifications

DIMENSIONS	AREA OF SHOT DETECTION	TARGET
126 x 126 x 24 mm	82 x 82 mm	Ø 37.75mm
LIGHTING	OPERATING TEMPERATURE	SUN RESISTANCE
Inbuilt RGB LED	-10°C to +55°C	40000 LUX
WATER RESISTANCE	POWER SUPPLY	PORT
No	5V DC (2A) USB C	USB C
PROCESSOR	WEIGHT	BLUETOOTH VERSION
32 Bit Arm Cortex M0+	360gm	4.2 LE
RECOMMENDED DIAMETER OF INCIDENT LASER DOT	RECOMMENDED LASER WAVELENGTH RANGE	ACCURACY OF SHOT DETECTION
>5 mm	640 nm to 660 nm	±1 mm